


Lecture  
Music Processing

## Signals and Fourier Transform

**Meinard Müller**  
International Audio Laboratories Erlangen  
meinard.mueller@audiolabs-erlangen.de

## Signals


Sinusoidal

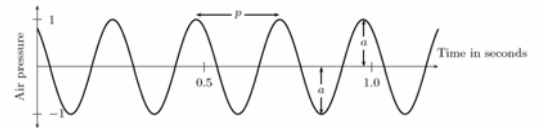


## Signals

Sinusoidal  $f(t) = A \sin(2\pi(\omega t - \varphi))$  for  $t \in [0, 2]$


$A = 1, \omega = 1, \varphi = 0$




$A = 1, \omega = 3, \varphi = 0$



$A = 1.4, \omega = 1, \varphi = 0.25$




$A = 0.8, \omega = 3, \varphi = 0.5$




## Signals

Sinc-function  $\text{sinc}(t) := \begin{cases} \frac{\sin \pi t}{\pi t} & \text{if } t \neq 0 \\ 1 & \text{if } t = 0 \end{cases}$

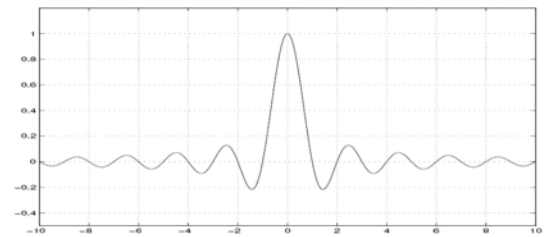


## Signals

Chirp signal

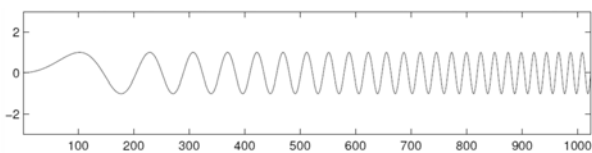

## Sampling


Original CT signal

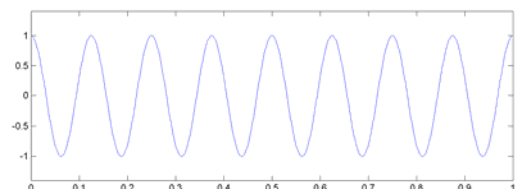

## Sampling

Original CT signal


DT signal sampled with 50 Hz

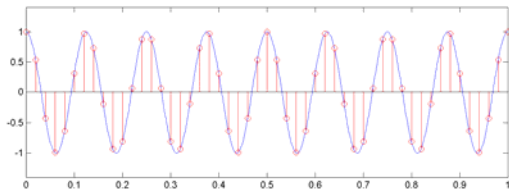

## Sampling

Original CT signal


DT signal sampled with 32 Hz

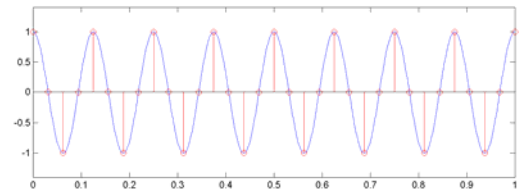

## Sampling

Original CT signal


DT signal sampled with 16 Hz

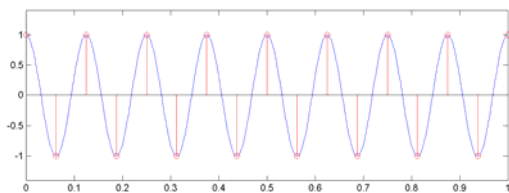

## Sampling


Original CT signal

DT signal sampled with 10 Hz

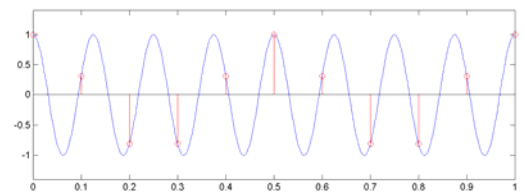

## Signals


Superposition

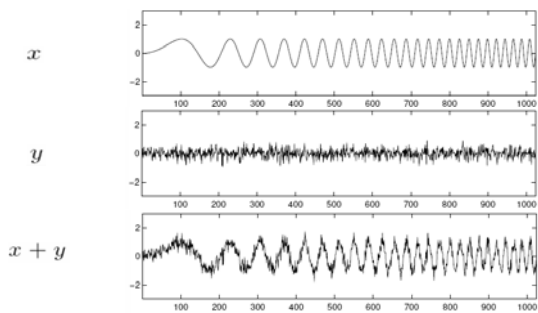


## Fourier Transform

Signal space	$L^2(\mathbb{R})$	$L^2([0, 1])$	$\ell^2(\mathbb{Z})$
Inner product	$\langle f g \rangle = \int_{t \in \mathbb{R}} f(t)\overline{g(t)}dt$	$\langle f g \rangle = \int_{t \in [0, 1]} f(t)\overline{g(t)}dt$	$\langle f g \rangle = \sum_{n \in \mathbb{Z}} x(n)\overline{y(n)}$
Norm	$\ f\ _2 = \langle f f \rangle^{\frac{1}{2}}$	$\ f\ _2 = \langle f f \rangle^{\frac{1}{2}}$	$\ x\ _2 = \langle x x \rangle^{\frac{1}{2}}$
Definition	$L^2(\mathbb{R}) := \{f : \mathbb{R} \rightarrow \mathbb{C} \mid \ f\ _2 < \infty\}$	$L^2([0, 1]) := \{f : [0, 1] \rightarrow \mathbb{C} \mid \ f\ _2 < \infty\}$	$L^2(\mathbb{Z}) := \{f : \mathbb{Z} \rightarrow \mathbb{C} \mid \ x\ _2 < \infty\}$
Elementary frequency function	$\mathbb{R} \rightarrow \mathbb{C}$ $t \mapsto e^{2\pi i \omega t}$	$[0, 1] \rightarrow \mathbb{C}$ $t \mapsto e^{2\pi i k t}$	$\mathbb{Z} \rightarrow \mathbb{C}$ $n \mapsto e^{2\pi i \omega n}$
Frequency parameter	$\omega \in \mathbb{R}$	$k \in \mathbb{Z}$	$\omega \in [0, 1]$
Fourier representation	$f(t) = \int_{\omega \in \mathbb{R}} c_{\omega} e^{2\pi i \omega t} d\omega$	$f(t) = \sum_{k \in \mathbb{Z}} c_k e^{2\pi i k t}$	$x(n) = \int_{\omega \in [0, 1]} c_{\omega} e^{2\pi i \omega n} d\omega$
Fourier transform	$\hat{f} : \mathbb{R} \rightarrow \mathbb{C}$ $\hat{f}(\omega) = \int_{t \in \mathbb{R}} f(t) e^{-2\pi i \omega t} dt$ $c_{\omega} = \hat{f}(\omega)$	$\hat{f} : \mathbb{Z} \rightarrow \mathbb{C}$ $\hat{f}(k) = \int_{t \in [0, 1]} f(t) e^{-2\pi i k t} dt$ $c_k = \hat{f}(k)$	$\hat{x} : [0, 1] \rightarrow \mathbb{C}$ $\hat{x}(\omega) = \sum_{n \in \mathbb{Z}} x(n) e^{-2\pi i \omega n}$ $c_{\omega} = \hat{x}(\omega)$


### Fourier Transform

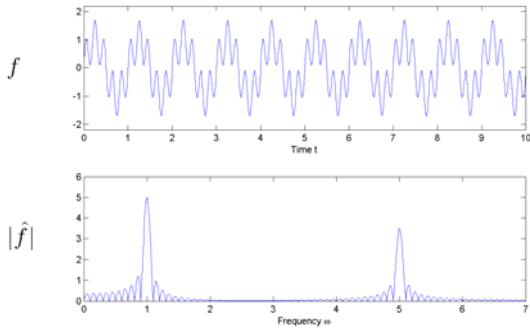

### Fourier Transform

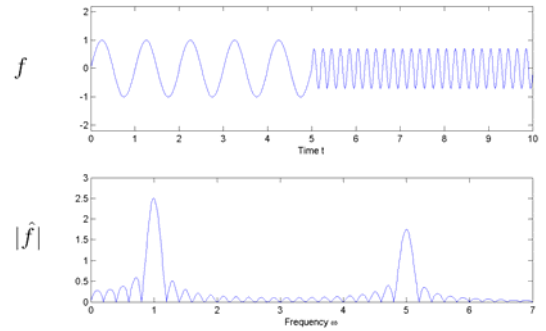


### Fourier Transform

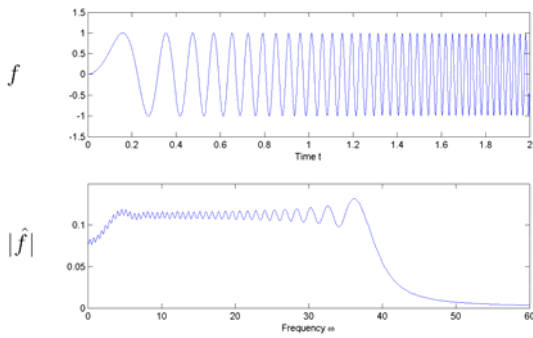


### Fourier Transform

Gaussian function  $f(t) = (2\pi)^{-\frac{1}{2}}\pi^{-\frac{1}{4}}e^{-\pi t^2}$

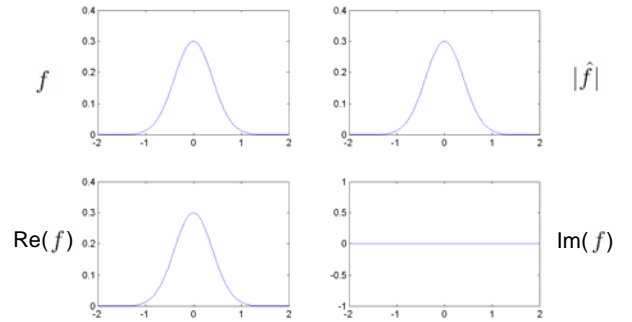


### Fourier Transform

Box function

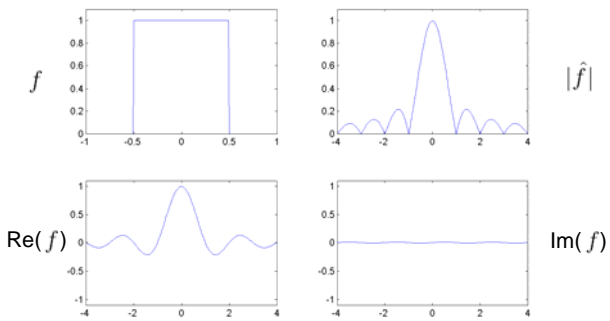


### Fourier Transform

Box function (translated)

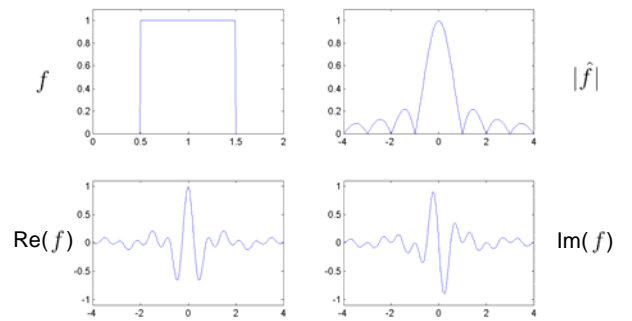


## Fourier Transform

Box function (translated)

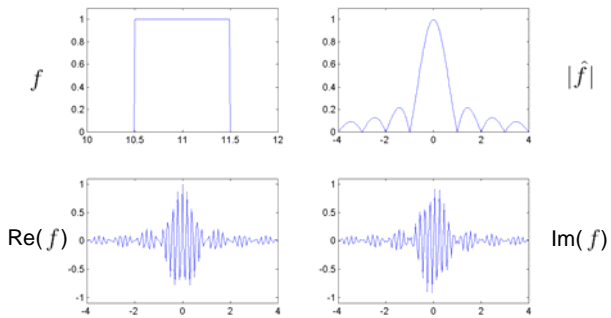


## Fourier Transform

Dirac sequence

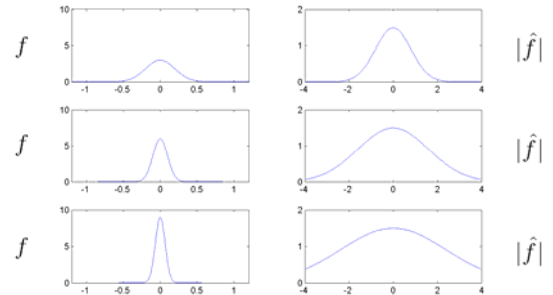

## Discrete Fourier Transform (DFT)

$$\Omega_N := e^{-2\pi i/N}$$




$$\text{DFT}_N := \frac{1}{\sqrt{N}} \left( \Omega_N^{kj} \right)_{0 \leq k, j < N}$$

$$= \frac{1}{\sqrt{N}} \begin{pmatrix} 1 & 1 & \dots & 1 & 1 \\ 1 & \Omega_N & \dots & \Omega_N^{(N-2)} & \Omega_N^{(N-1)} \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 1 & \Omega_N^{(N-2)} & \dots & \Omega_N^{(N-2)(N-2)} & \Omega_N^{(N-2)(N-1)} \\ 1 & \Omega_N^{(N-1)} & \dots & \Omega_N^{(N-1)(N-2)} & \Omega_N^{(N-1)(N-1)} \end{pmatrix}$$

## Discrete Fourier Transform (DFT)

$$v(k) = f(Tk), \quad k \in [0 : N - 1], \quad \hat{v} = \text{DFT}_N(v)$$

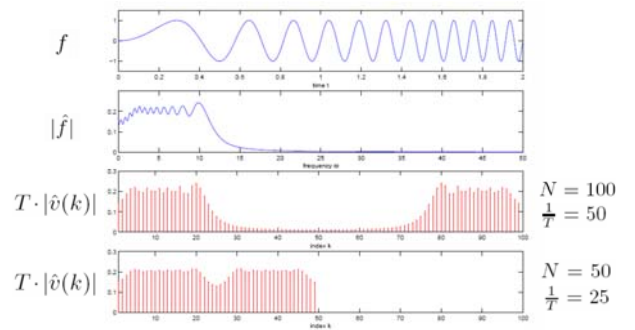

## Fast Fourier Transform (FFT)

$$N = 2M$$

$$\text{DFT}_N \cdot \begin{pmatrix} v_0 \\ v_1 \\ \vdots \\ v_{N-1} \end{pmatrix} = \frac{1}{\sqrt{2}} \begin{pmatrix} \text{id}_M & \Delta_M \\ \text{id}_M & -\Delta_M \end{pmatrix} \begin{pmatrix} \text{DFT}_M & 0 \\ 0 & \text{DFT}_M \end{pmatrix} \begin{pmatrix} v_0 \\ v_2 \\ \vdots \\ v_{N-2} \\ v_1 \\ v_3 \\ \vdots \\ v_{N-1} \end{pmatrix}$$

$$\text{id}_M = \text{diag}(1, 1, \dots, 1)$$

$$\Delta_M = \text{diag}(1, \Omega_N, \dots, \Omega_N^{M-1})$$